
Limit Switch Stop Close:

Open Motor Wire to Control Open
Close Motor Wire to Limit Black
Limit White to Control Close Wire

Limit Switch Stop Open:

Close Motor Wire to Control Close
Open Motor Wire to Limit Black
Limit White to Control Open Wire

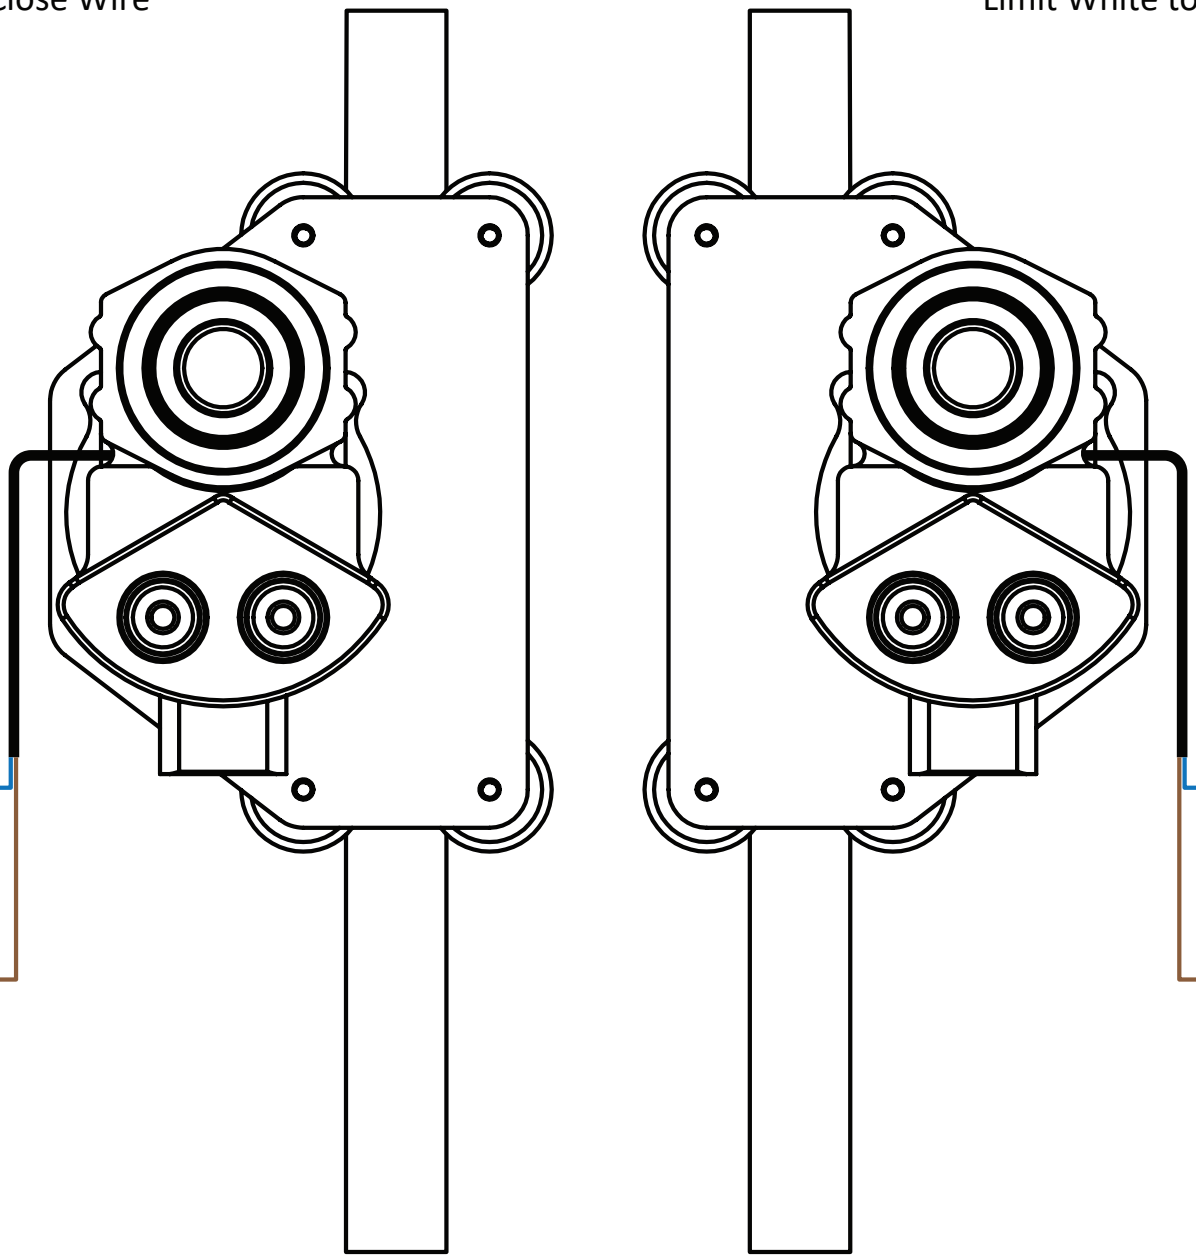

Blue Wire
Counter Clockwise Rotation
Red Limit Switch Control
Left Side - Close Operation

Brown Wire
Clockwise Rotation
Black Limit Switch Control
Left Side - Open Operation

Blue Wire
Counter Clockwise Rotation
Red Limit Switch Control
Right Side - Open Operation

Brown Wire
Clockwise Rotation
Black Limit Switch Control
Right Side - Close Operation